

DS-3E0528HP-E 24 Port Gigabit Unmanaged POE Switch




DS-3E0528HP-E switches are layer 2 Hi-PoE switches, providing PoE power supply technology and Gigabit network design on the basis of network access to ensure stable data upload. The switches support Hi -PoE, long range, port isolation, and PoE watchdog functions.

- 20 × gigabit PoE port, 4 × gigabit Hi-PoE port, 2 × gigabit RJ45 port, and 2 × gigabit fiber optical port.
- IEEE 802.3at/af/bt standard for Hi-PoE ports (Max. 90 W PoE output).
- IEEE 802.3at/af standard for PoE ports (Max. 30 W PoE output).
- IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab, and IEEE 802.3z standard.
- 6 KV surge protection for PoE ports.
- Up to 300 m long-range transmission.
- PoE watchdog to auto detect and restart the cameras that do not respond.
- Port isolation to improve network security.
- Gigabit network access design.
- Wire-speed forwarding.
- Store-and-forward switching.
- Solid high-strength metal shell.

▪ Specification

General	
Shell	Metal material
Net Weight	2.98 kg (6.57 lb)
Dimensions (W × H × D)	440.0 mm × 44.0 mm × 220.8 mm (17.32" × 1.73" × 8.69")
Operating Temperature	0 °C to 45 °C (32 °F to 113 °F)
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Operating Humidity	5% to 95% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Power Supply	100~240 VAC, 50/60 Hz, Max. 6.5 A
Max. Power Consumption	400 W
Power Consumption in Idle	30 W
Installation Mode	Rack (equipped with mounting ears)
Surge Protection	6 KV
Network Parameters	
Ports	24 × Gigabit PoE port, 2 × Gigabit RJ45 port, 2 × Gigabit fiber optical port
MAC Address Table	8 K
Switching Capacity	56 Gbps
Packet Forwarding Rate	41.664 Mpps
Internal Cache	4.1Mbits
PoE Power Supply	
PoE Standard	IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt
PoE Port	Hi-PoE: Ports 1 to 4 PoE: Ports 1 to 24
PoE Power Pin	8-pin power: 1/2(-), 3/6(+), 4/5(+), 7/8(-)
Max. Port Power	Ports 1 to 4: 90 W Ports 5 to 24: 30 W
PoE Power Budget	370 W
Dialing Function	
Long Range	Ports 21 to 24: up to 300 m. Long range performance may vary depend on camera model or cable condition.
Port Isolation	Ports 1 to 24: port isolation mode to improve network security. Ports in an isolation group cannot communicate with each other, but they can communicate with ports outside the isolation group.
PoE Watchdog	Ports 1 to 24: auto detect and restart the cameras that do not respond.
Approval	
EMC	FCC (47 CFR Part 15, Subpart B), CE-EMC (EN 55032:2015+A11: 2020, EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1: 2019, EN 50130-4:2011+A1: 2014, EN 55035:2017+A11: 2020), IC (ICES-003: Issue 7:2020), RCM (AS/NZS CISPR 32: 2015)
Safety	UL (UL 60950-1), CB (AMD1:2009, AMD2:2013, IEC 62368-1:2014 (Second Edition), CE-LVD (EN 62368-1:2014+A11: 2017)
Chemistry	CE-RoHS (2011/65/EU)

▪ Typical Application

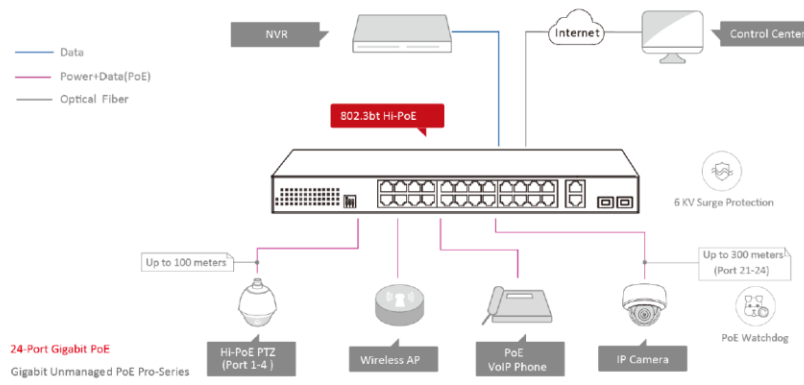


▪ **Available Model**

DS-3E0528HP-E

DS-3E0528HP-E/HIK USA

▪ **Dimension**

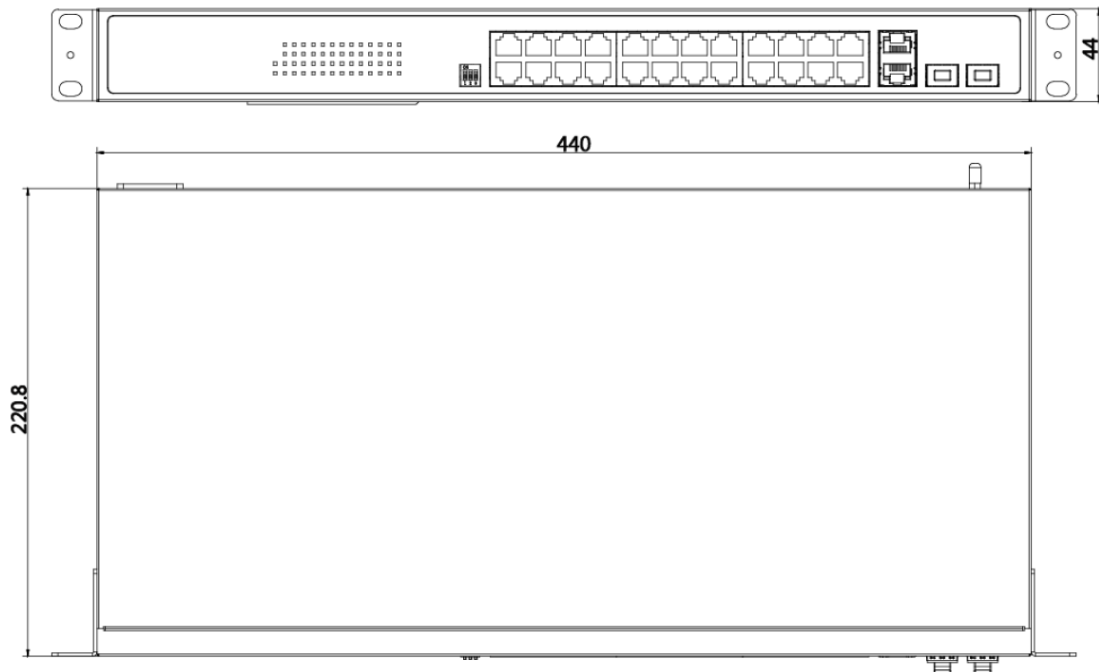

▪ **Accessory**

▪ **Optional**

HK-SFP-1.25G-20-1 550	HK-SFP-1.25G-20-1 310	HK-SFP-1.25G-1310 -DF-MM	HK-SFP-1.25G-20-1 310-DF

See Far, Go Further



www.hikvision.com
support@hikvision.com

