

DS-C30S-04VI 4-Channel VGA Input Board




The video wall controller is mainly used for screen splicing control system, and is the core control device of the system. As a new-generation FPGA-based pure hardware image processing device, it adopts the dual data switching technology and the structure of main control board and service boards. It supports processing and transmitting large data, processing multiple high-definition and ultra-high-definition signals in real time, and managing multiple screens.

- Supports 4 channels of VGA video input and YUV 444 collection.
- Provides one mini-DP audio input port to allow 4 channels of 3.5 mm audio input via the audio adapter cable.

▪ Specification

Chassis	
Occupied Slot	Input slot
Audio Input	
Audio Input Interfaces	4
Audio Input Interface Type	Mini-DP to 4 channels of 3.5 mm
Audio Sampling Rate	48K sampling rate
Audio Channel	Dual channel
Video Input	
Video Input Interface Type	VGA
Video Input Interfaces	4
Video Input Resolution	1024 × 768@60 Hz, 1280 × 1024@60 Hz, 1366 × 768@60 Hz, 1440 × 900@60 Hz, 1680 × 1050@60 Hz, 1280 × 960@60 Hz, 1600 × 1200@60 Hz, 1280 × 720p@50 Hz, 1280 × 720p@60 Hz, 1920 × 1080p@50 Hz, 1920 × 1080p@60 Hz, 1920 × 1200@60 Hz
Max. Video Input Resolution	1080p

▪ Dimension

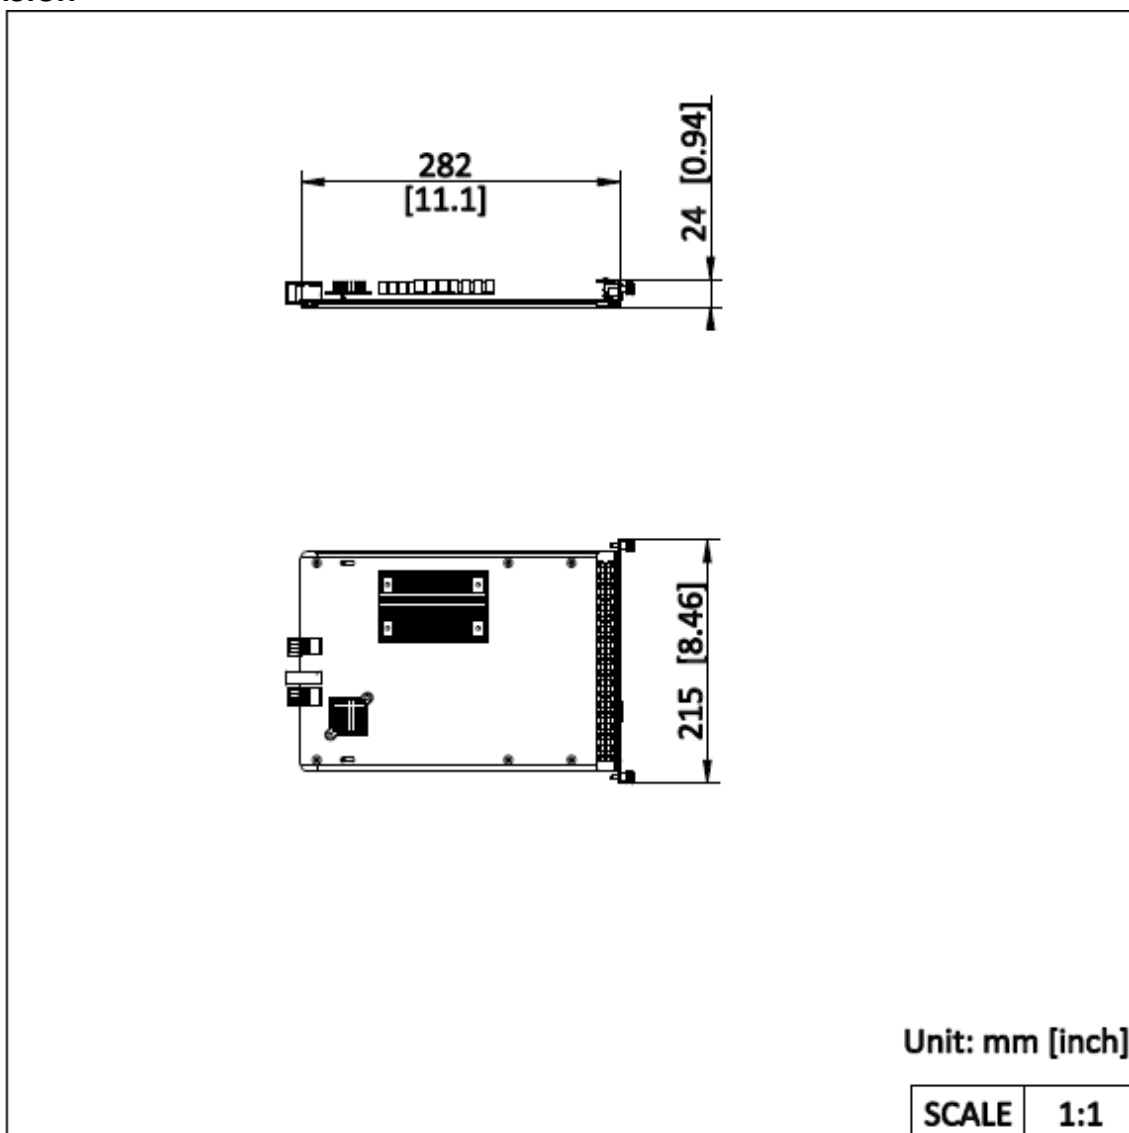

- Accessory
- Optional



See Far, Go Further



www.hikvision.com
support@hikvision.com

